

Features


1. Suitable for flammable working environments.
2. The valve is actuated by air for accurate response.




How to order

SK320 N	—	01	N	S
3/2 Way	Acting style	Port size	Thread	Pneumatic control
	Blank: Normally closed N : Normally open	01 : 1/8"(option) 02 : 1/4" 03 : 3/8" 04 : 1/2"	Blank : G N : NPT R : Rc	S : Single pneumatic

Flow chart

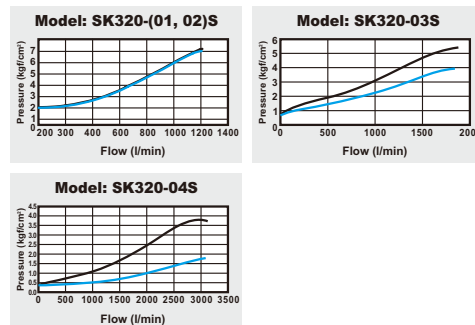

Dimensions

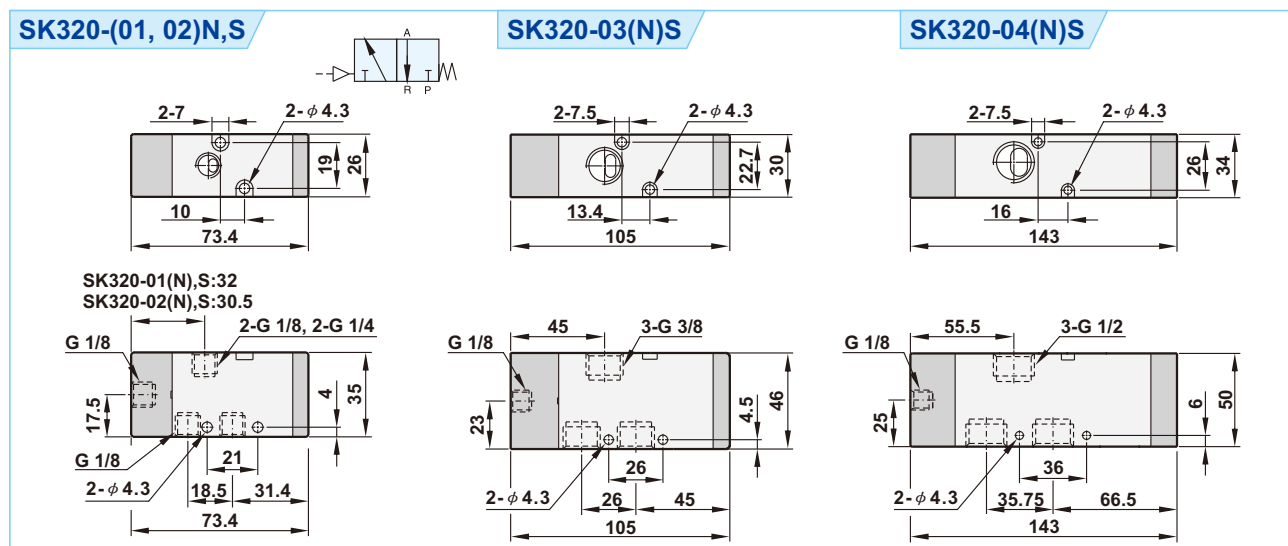

Specifications

Model	SK320-01S	SK320-02S	SK320-03S	SK320-04S
Port size	1/8"	1/4"	3/8"	1/2"
Body material	Aluminum alloy			
Effective area	14mm ²	18mm ²	35mm ²	70mm ²
Fluid	Compressed air			
Acting	External pilot (1.5 ~ 7 kgf/cm ²)			
Operating pressure range	0 ~ 8 kgf/cm ²			
Proof pressure	9.9 kgf/cm ²			
Ambient temperature	-10℃ ~ 60℃			
Net weight	180g		375g	595g