

5/2, 5/3 Way Pneumatic Valve

26/30/34mm width

■ Features

1. Suitable for flammable working environments.
2. The valve is actuated by air for accurate response.



■ How to order


SK520	X	—	01	N	S
520 : 5/2 Way	Acting style		Port size	Thread	Pneumatic control
530 : 5/3 Way	Blank : Standard		01 : 1/8" (option)	Blank : G	S : Single pneumatic
	5/3 Way		02 : 1/4"	N : NPT	D : Double pneumatic
	Blank : Closed center		03 : 3/8"	R : Rc	
	X : Exhaust center		04 : 1/2"		
	Y : Pressurized center				

**5/3 way valve is only available for double pneumatic control.

■ Specifications

Model	SK520-02S(D)	SK530-02D	SK520-03S(D)	SK530-03D	SK520-04S(D)	SK530-04D
Port size	1/4"		3/8"		1/2"	
Body material	Aluminum alloy					
Fluid	Compressed air					
Effective area	18mm ²	14mm ²	35mm ²	32mm ²	70mm ²	54mm ²
Acting	External pilot (1.5 ~ 7 kgf/cm ²)					
Operating pressure range	0~8kgf/cm ²	0~7kgf/cm ²	0~8kgf/cm ²	0~7kgf/cm ²	0~8kgf/cm ²	0~7kgf/cm ²
Proof pressure	9.9 kgf/cm ²					
Ambient temperature	-10℃ ~ 60℃					
Net weight	170g/180g	310g	370g/400g	585g	565g/605g	865g

■ Flow chart

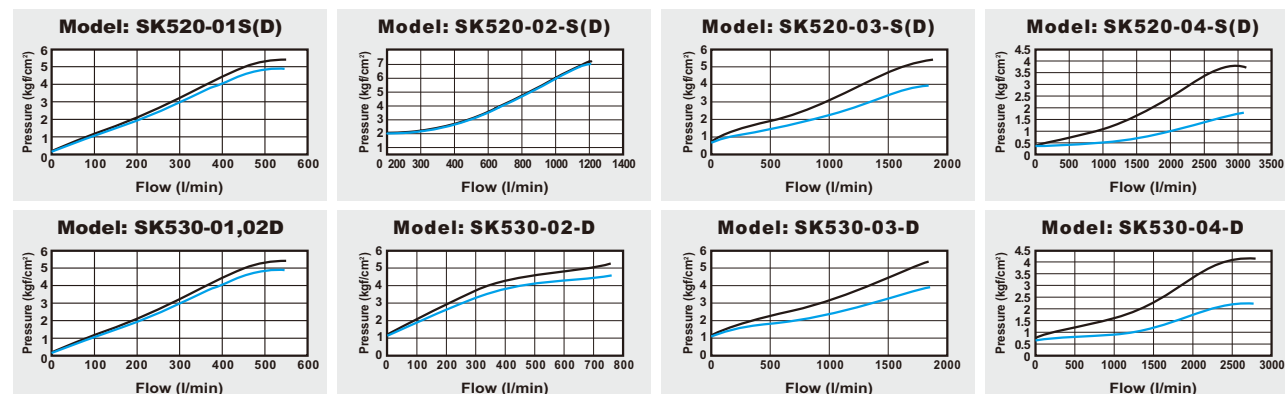

■ Dimensions

