



■ Symbol

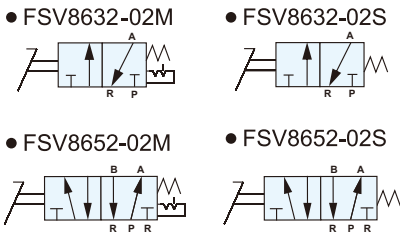

■ Features

- 1. Aluminum alloy construction for durable use.
- 2. Available to be installed with polycarbonate protective guard.

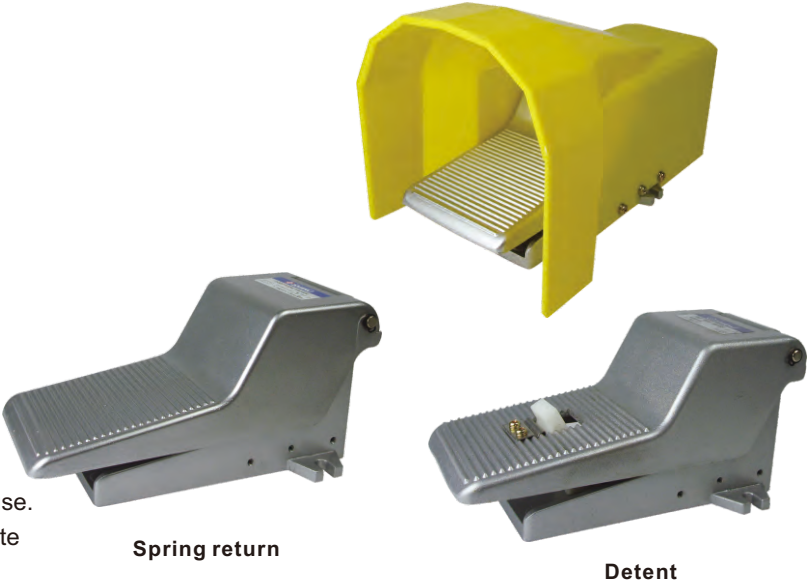


■ How to order

FSV8632	—	02	N	M	F
FSV8652 : 5/2 Way		Port size	Thread	Acting	Protective guard
FSV8632 : 3/2 Way		02 : 1/4"	Blank : G N : NPT R : Rc	S : Spring return M : Detent	Blank : W/O guard F : W/ I guard

■ Specifications


Model	FSV8632-02	FSV8652-02
Port size	1/4"	
Body material	Aluminum alloy	
Fluid	Compressed air	
Sectional area	12mm ²	
Operating pressure range	0 ~ 9 kgf/cm ²	
Proof pressure	10 kgf/cm ²	
Ambient temperature	-10℃ ~ 60℃	

■ Flow chart

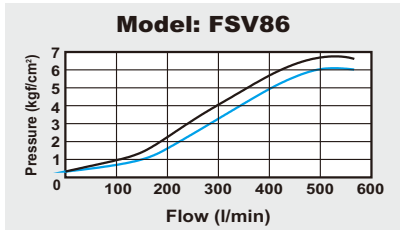


■ Dimensions

FSV8652-02M(S), FSV8632-02M(S)

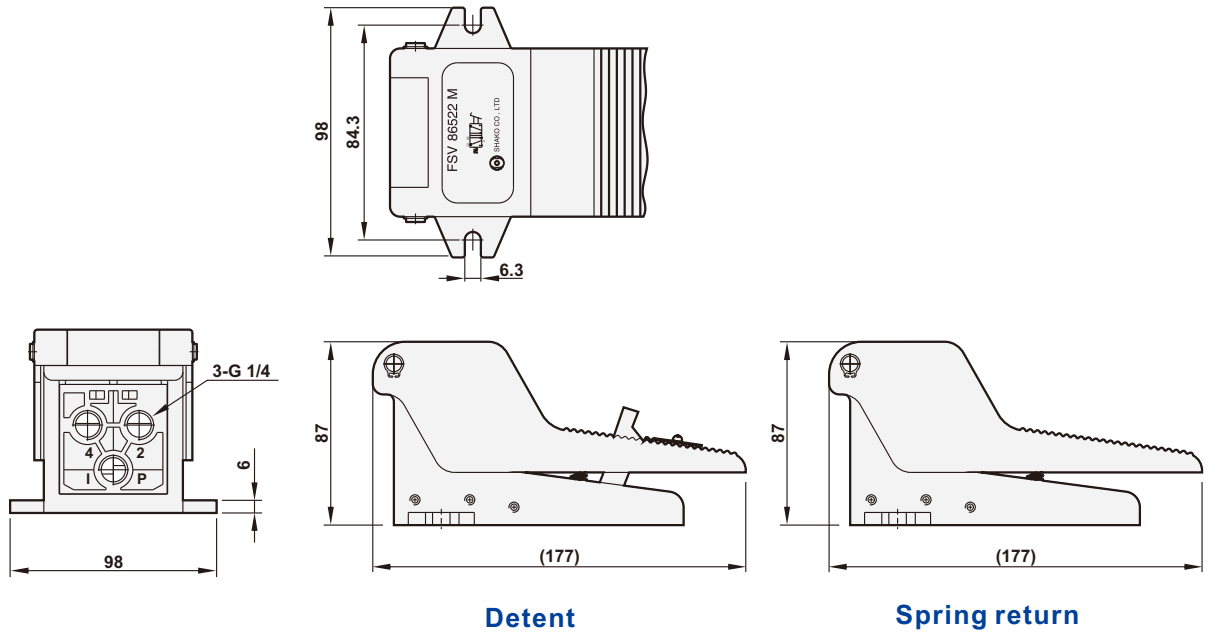

■ Guard dimensions

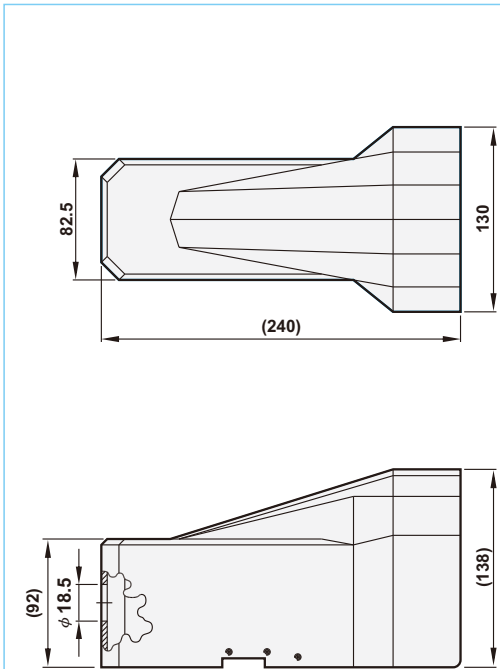

■ Explosion

