

Features

- To be installed in moving devices like air cylinder, slide, etc.
- Various operating styles.
- Panel bore size  $\phi$  30 (Option  $\phi$  25).




How to order

MSV9832 – 02		N	R	G
3/2 Way	Port size	Thread	Operator	Operator color
	01: 1/8" (Option)	Blank : G	R : Roller	Blank : Standard color
	02: 1/4"	N : NPT	TB : Twist selector	G : Green
		R : Rc	LB : Long twist selector	B : Black
			PB : Palm button (Mushroom)	Y : Yellow
			PP : Palm button (Flush)	
			PPL : Palm button (Extended)	
			EB : Latching button	

Specifications

Model	MSV9832-02
Port size	1/4" (Option 1/8")
Body material	Aluminum alloy
Panel dimension	30mm (Option:25mm)
Fluid	Compressed air
Sectional area	18mm <sup>2</sup>
Operating pressure range	0 ~ 9 kgf/cm <sup>2</sup>
Proof pressure	10 kgf/cm <sup>2</sup>
Ambient temperature	-10℃ ~ 60℃
Standard operator color	Black: TB, LB; Red: PB, PP, PPL, EB

Dimensions

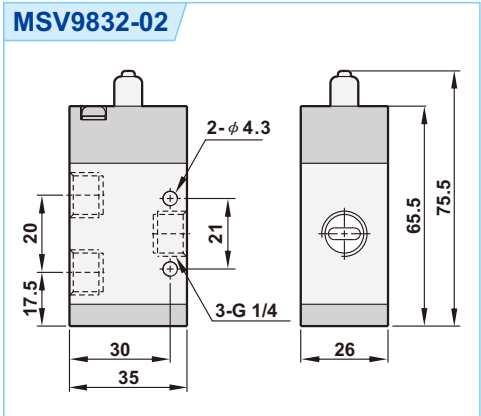

Dimensions

