

Features

- To be installed in moving devices like air cylinder, slide, etc.
- Various operating styles.
- Panel bore size ϕ 30 (Option ϕ 25).



How to order


MSV8632	01	N	R	G
MSV8622 : Single	Port size	Thread	Operator	Operator color
MSV8642 : Stack	01: 1/8"	Blank : G	R : Roller	Blank : Standard color
MSV8632 : Single (with exhaust port)		N : NPT	RL : One way roller	G : Green
MSV8662 : Stack (with exhaust port)		R : Rc	TB : Twist selector	B : Black
			LB : Long twist selector	Y : Yellow
			EB : Latching button	

* MSV8642 & MSV8662 for TB operator only.

Specifications

Model	MSV8632-01	MSV8642-01TB
Port size	1/8"	
Body material	Aluminum alloy	
Panel dimension	30mm (Option:25mm)	
Fluid	Compressed air	
Sectional area	1.8mm ²	
Operating pressure range	0 ~ 9 kgf/cm ²	
Max. operating pressure	10 kgf/cm ²	
Ambient temperature	-10℃ ~ 60℃	
Standard operator color	Black: TB, LB; Red: PB, PP, PPL, EB	

Dimensions

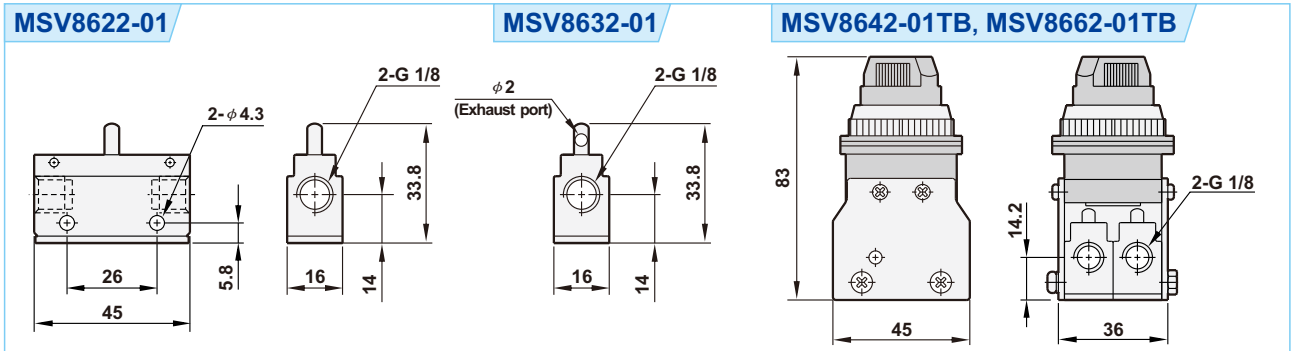

Dimensions

