


Symbol



Features

1. Easy operation.
2. Large flow rate.
3. Suitable for vacuum operation.
4. Mounting bracket as optional accessory.



How to order


TSV8753	02	N	M
5/3 Way	Port size	Thread	Acting
	02 : 1/4"	Blank: G	S : Spring return
	03 : 3/8"	N : NPT	M : Detent
	04 : 1/2"	R : Rc	SX : Exhaust center, Spring return
			MX : Exhaust center, Detent

Specifications

Model	TSV8753-02M(S)	TSV8753-03M(S)	TSV8753-04M(S)
Port size	1/4"	3/8"	1/2"
Body material	Aluminum alloy		
Fluid	Compressed air		
Sectional area	18mm ²	35mm ²	38mm ²
Operating pressure range	0 ~ 9 kgf/cm ²		
Proof pressure	10 kgf/cm ²		
Ambient temperature	-10℃ ~ 60℃		



Flow chart

Model: TSV8753-02,03M(S)


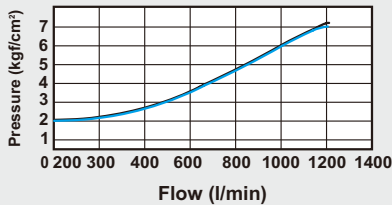


Dimensions



TSV8753-02M





TSV8753-03M





TSV8753-04M

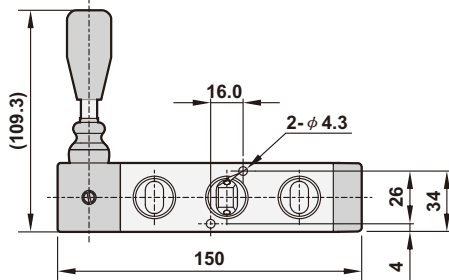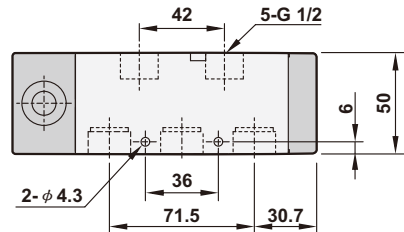

TSV8753-02S



TSV8753-03S

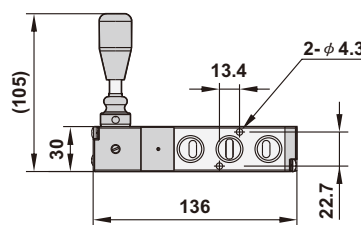

TSV8753-04S

