


Symbol



Features

- 1. Compact size with effective air service.
- 2. Oil spray in mist ensures good lubrication for machines.



\*Lubricator oil (Recommended): ISO-VG32


How to order

L200A	—	02	N	B	A	K
Miniature Lubricator	Port size	Thread	Mounting bracket	Bowl	Bowl guard	
	01 : 1/8"(option) 02 : 1/4"	Blank :G N :NPT R :Rc	Blank :W/O bracket B :W/I bracket	Blank : Standard bowl A : Anti-acid & alkali bowl	Blank :W/O guard K :W/I guard	


Specifications

Model	L200A-01	L200A-02
Port size	1/8" (option)	1/4"
Fluid	Compressed air	
Body material	Polycarbonate	
Bowl material	Polycarbonate (Standard)	
Operating pressure range	0.5 ~ 9.9 kgf/cm <sup>2</sup>	
Proof pressure (Standard bowl)	12 kgf/cm <sup>2</sup>	
Max. flow rate l/min (ANR)	2449	
Ambient temperature	-10℃ ~ 60℃	
Lubricator bowl capacity	50cc	
Net weight	165g	
Option	Mounting bracket set	

Dimensions

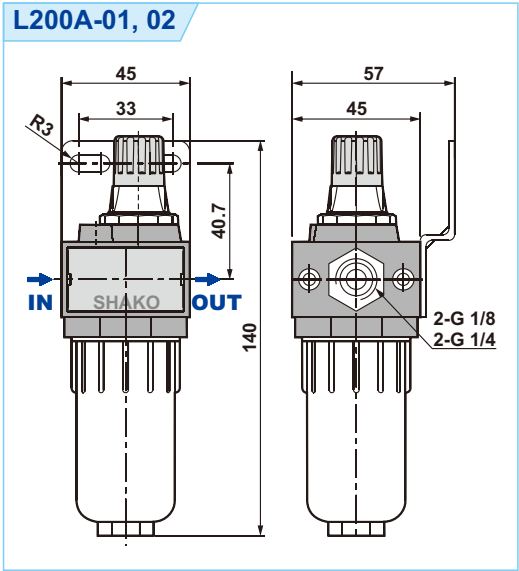

Flow chart



Note:

X axis: Flow (l/min)  
Y axis: Pressure (kgf/cm<sup>2</sup>)  
Blue line (P0) = Outlet pressure  
Black line (P1) = Inlet pressure  
P1-P0=Pressure range

Memo...

