


Symbol



Features

1. For high pressure use, corrosion and chemical resistance.
2. Good performance for outdoor facility.
3. Suitable for semi-conductor industry.
4. Accurate and sensitive pressure setting.
5. Strict quality control.

How to order

USR	B	02	N
Stainless Steel Regulator	Pressure	Port size	Thread
	Blank : 12~30kgf/cm ² (for 1/4", 3/8", 1/2") 12~28kgf/cm ² (for 3/4", 1")	02 : 1/4" 03 : 3/8" 04 : 1/2" 06 : 3/4" 08 : 1"	Blank : G N : NPT R : Rc
	B : 0.5~12kgf/cm ²		

Please contact our sales for non-relieving type.

*For non-relieving type, the secondary pressure is not allowed to be exhausted when it is higher than setting pressure.


* Spring: USRB = SUS303
USR = Alloy steel

Specifications


Model	USR-02	USR-03	USR-04	USR-06	USR-08
Port size	1/4"	3/8"	1/2"	3/4"	1"
Fluid	Compressed air				
Regulator construction	Piston				
Body material	Stainless steel SUS316				
Pressure gauge material	Case: Stainless steel SUS304, Thread: Stainless steel SUS316				
Operating pressure range	USRB: 0.5 ~ 12 kgf/cm ² USR: 12 ~ 30 kgf/cm ²			USRB: 0.5 ~ 12 kgf/cm ² USR: 12 ~ 28 kgf/cm ²	
Max. inlet pressure	60 kgf/cm ²				
Max. flow rate l/min (ANR)	1950	2250	2520	B9000/18000	B9400/22000
Ambient temperature	-10℃ ~ 70℃				
Net weight	1400g			3400g	
Accessories	Pressure gauge (0~20kg), Plug, Mounting bracket set				
Option	Pressure gauge (0~10kg), Pressure gauge (0~30kg)				

Dimensions


USR-02, 03, 04

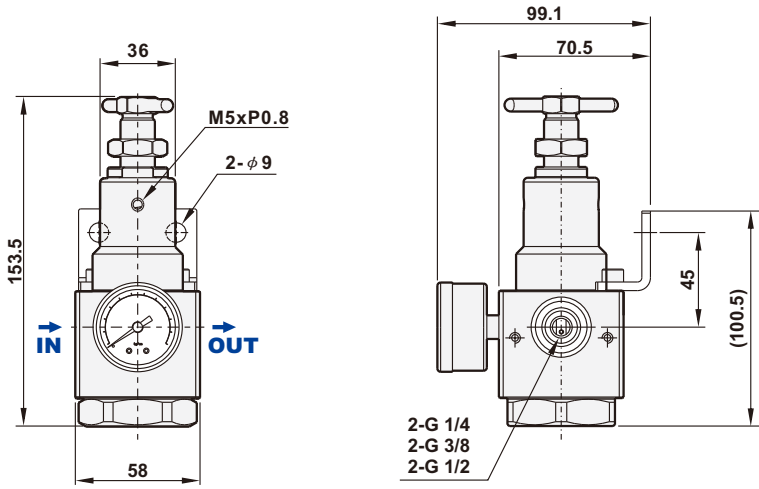

USR-06, 08

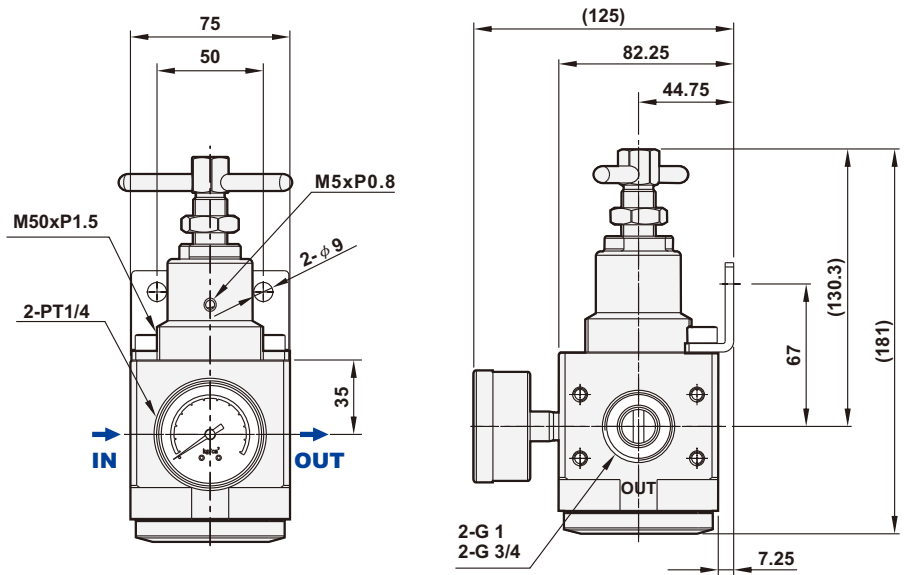

Flow chart

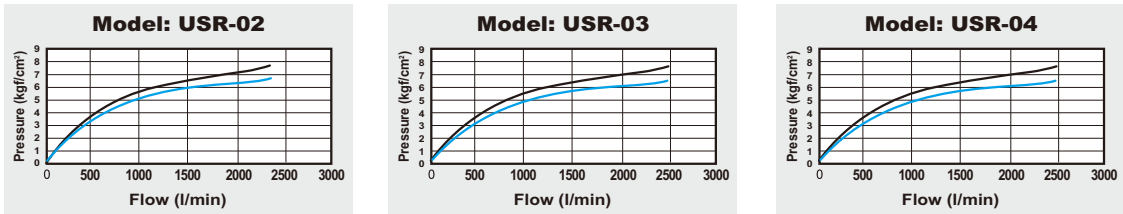

Note: X axis: Flow (l/min), Y axis: Pressure (kgf/cm²), Blue line (P0) = Outlet pressure, Black line (P1) = Inlet pressure, P1-P0= Pressure range